

double square right

EUROPE

main specifications

mounting: wall
environment: indoor use
lightsource: 6,4W
ip: 20

optical


lighting type: indirect
lighting distribution: to the right
cct: 2700k
cri: >90

electrical

current: 230V
driver: inclusive
dimming: Non-Dim / Phasedim / Dali

physical

orientation: fix
fixture: 255 x 255 x 73 mm
finishes: wheatered brass
wheatered bronze
wheatered gunmetal
smoke aluminium

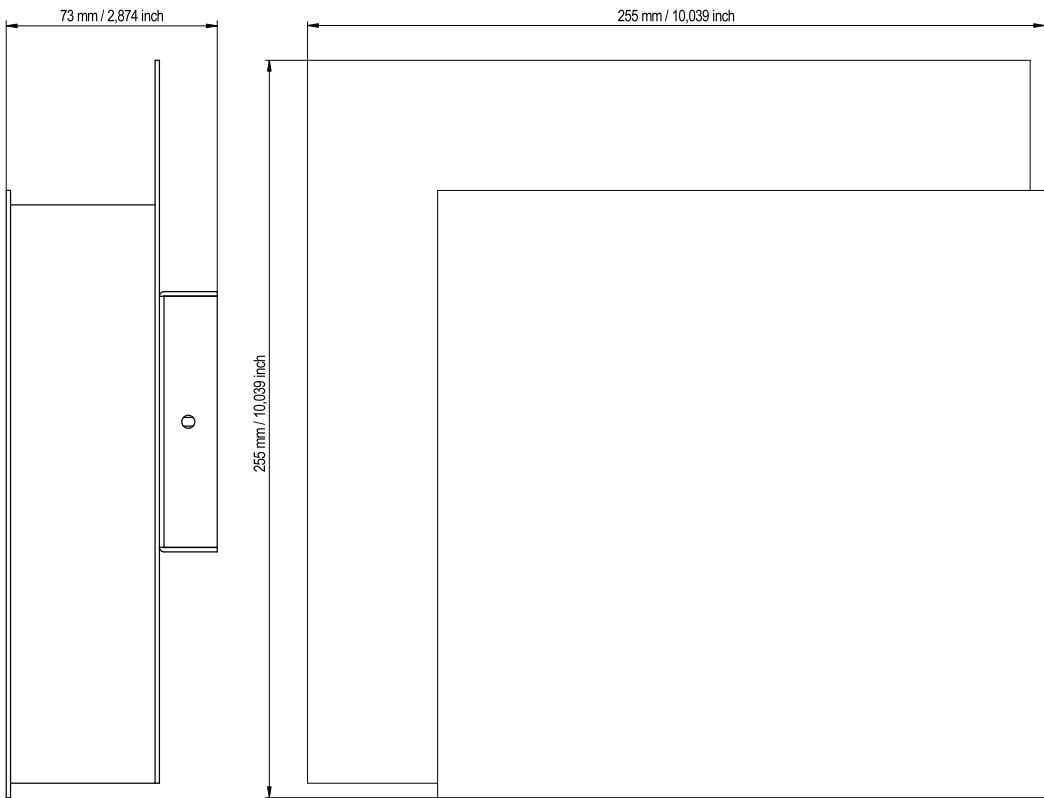

		wheatered brass	wheatered bronze	wheatered gunmetal	smoked aluminium
interior right	230V - Non-Dim	K223.WR4670.WB.ND	K223.WR4670.WZ.ND	K223.WR4670.WG.ND	K223.WR4670.SA.ND
	230V - PhaseDim	K223.WR4670.WB.PH	K223.WR4670.WZ.PH	K223.WR4670.WZ.PH	K223.WR4670.SA.PH
	230V - DALI	K223.WR4670.WB.DA	K223.WR4670.WZ.DA	K223.WR4670.WG.DA	K223.WR4670.SA.DA