

ferry 100 x 1200 exterior

EUROPE

main specifications

mounting: wall
environment: outdoor use
lightsource: 2xLED 5,9W
ip: 65

optical


lighting type: indirect
lighting distribution: symmetric
cct: 2700k
cri: >90

electrical

current: 350 mA / 230V
driver: Exclusive / Inclusive
dimming: 350mA (see driver) / 230V (non-dim)

physical

orientation: fix
fixture: ø100 x 110 x h 1200 mm
finishes: wheatered brass
wheatered bronze
wheatered gunmetal

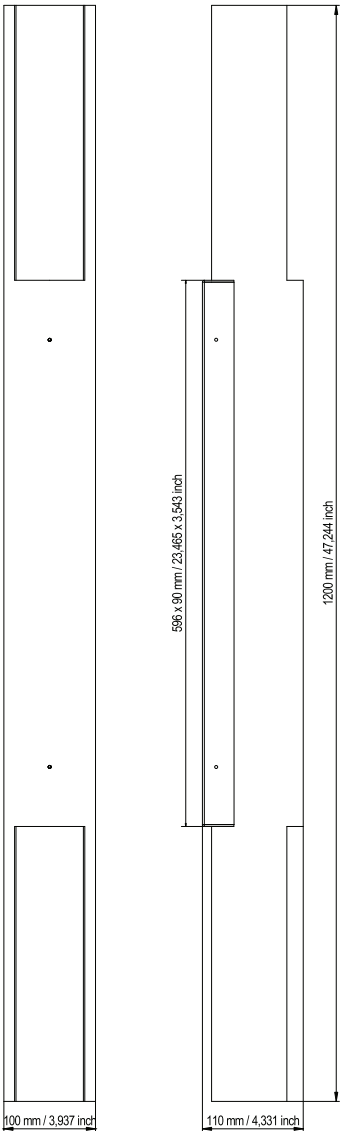

		wheatered brass	wheatered bronze	wheatered gunmetal
exterior	350mA	K271.WX9370.WB	K271.WX9370.WZ	K271.WX9370.WG
	230 V	K271.WX9670.WB.ND	K271.WX9670.WZ.ND	K271.WX9670.WG.ND