

# kurkuma 400

EUROPE

main specifications

mounting: ceiling / wall  
environment: indoor use  
lightsource: 8,8W  
ip: 20

optical


lighting type: indirect  
lighting distribution: symmetric  
cct: 2700K  
cri: >90

electrical

current: 230V  
driver: Inclusive  
dimming: Phasedim / Dali

physical

orientation: fix  
fixture: ø 400 x 145  
finishes: wheatered brass

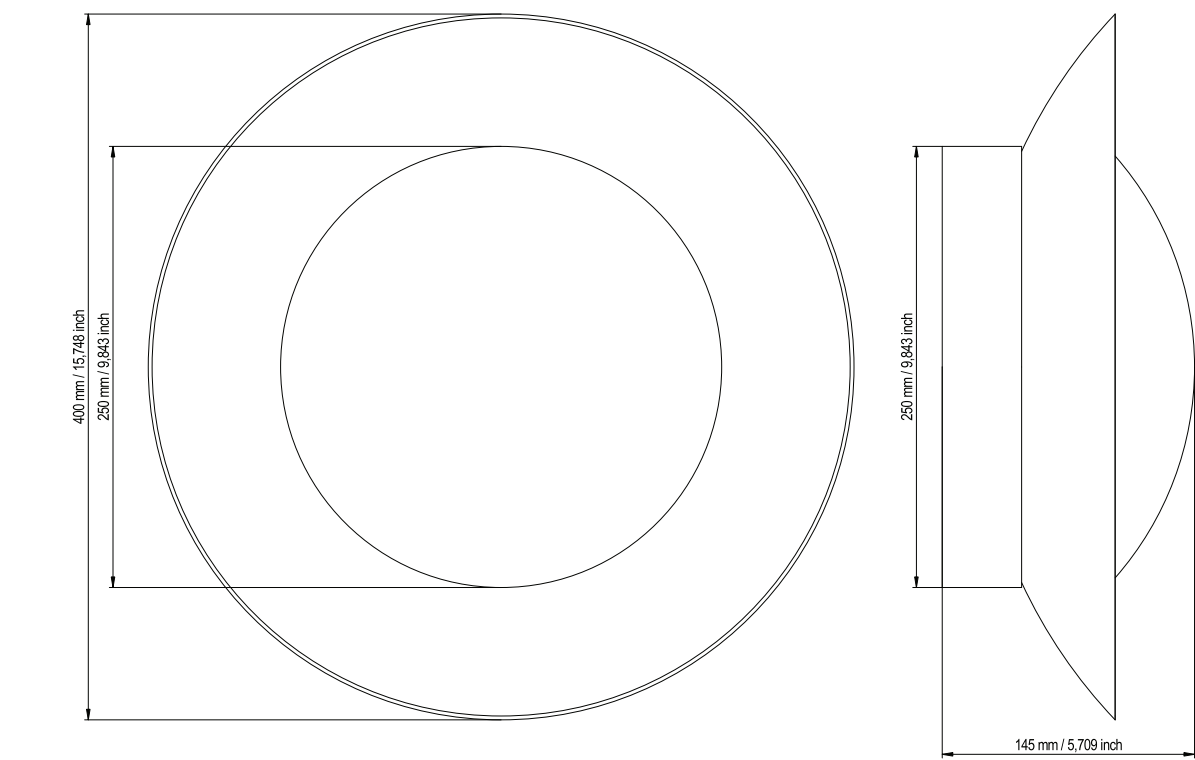

	wheatered brass
--	-----------------

230V Phasedim	K270.BR4670.WB.PH
230V DALI	K270.BR4670.WB.DA