

# ferry 60 x 600 exterior

EUROPE

main specifications

mounting: wall  
environment: outdoor use  
lightsource: 2xLED 4,2W  
ip: 65

optical


lighting type: indirect  
lighting distribution: symmetric  
cct: 2700k  
cri: >90

electrical

current: 350 mA / 230V  
driver: Exclusive / Inclusive  
dimming: 350mA (see driver) / 230V (non-dim)

physical

orientation: fix  
fixture: ø 60 x70 x h 600 mm  
finishes: wheatered brass  
wheatered bronze  
wheatered gunmetal

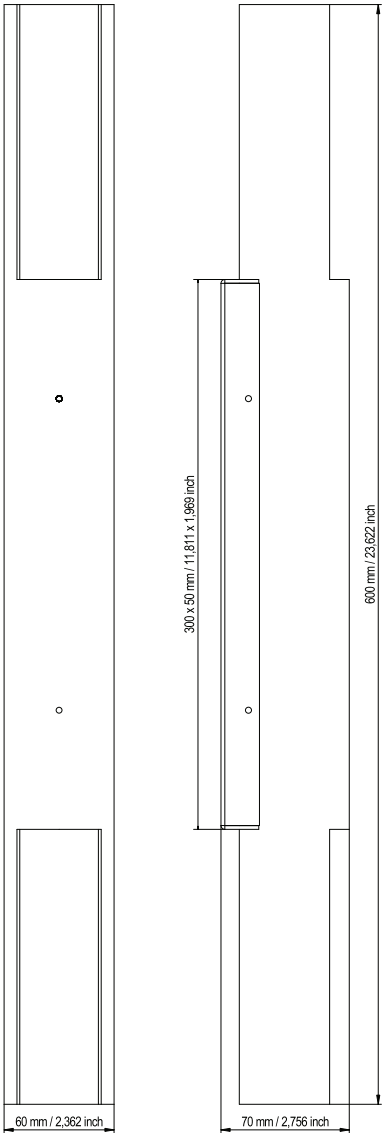

		wheatered brass	wheatered bronze	wheatered gunmetal
exterior	350mA	K271.WX6370.WB	K271.WX6370.WZ	K271.WX6370.WG
	230V	K271.WX6670.WB.ND	K271.WX6670.WZ.ND	K271.WX6670.WG.ND