

ferry 60 x 600 interior

EUROPE

main specifications

mounting: wall
environment: indoor use
lightsource: 2xLED 5,9W
ip: 20

optical


lighting type: indirect
lighting distribution: symmetric
cct: 2700k
cri: >90

electrical

current: 230V
driver: Inclusive
dimming: Phasedim / Dali

physical

orientation: fix
fixture: ø 60 x70 x h 600 mm
finishes: wheatered brass
wheatered bronze
wheatered gunmetal
bluesteel
smoke aluminium

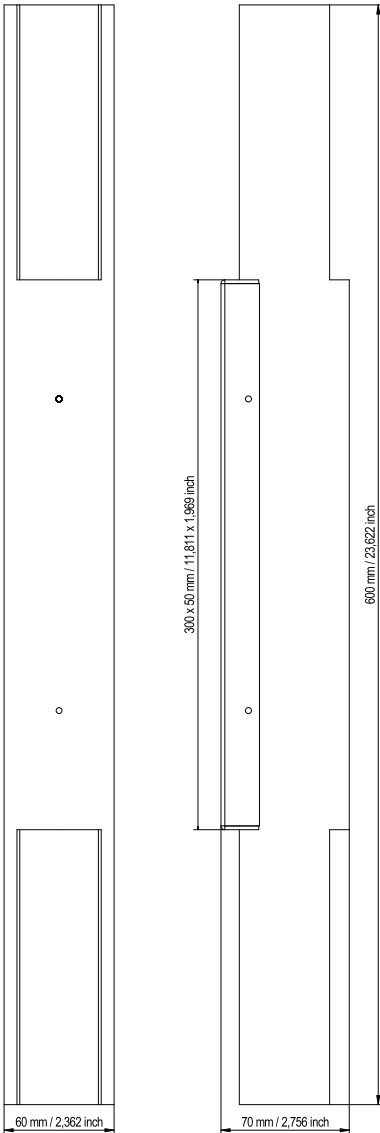

		wheatered brass	wheatered bronze	wheatered gunmetal	bluesteel	smoked aluminium
interior	230V - Phasedim	K271.WL6670.WB.PH	K271.WL6670.WZ.PH	K271.WL6670.WG.PH	K271.WL6670.ST.PH	K271.WL6670.SA.PH
	230V - DALI	K271.WL6670.WB.DA	K271.WL6670.WZ.DA	K271.WL6670.WG.DA	K271.WL6670.ST.DA	K271.WL6670.SA.DA